
# sliding doors





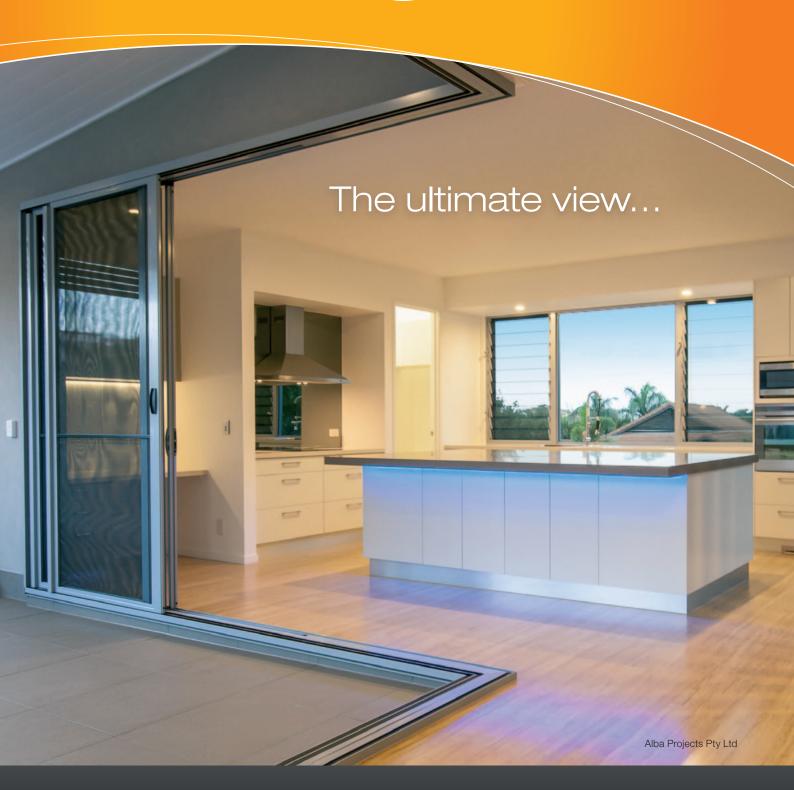

### essential range

### Features and Benefits

- Clean, uncluttered profile for a modern, streamlined look
- Rounded box section interlocks and mullions prevent curtains from being damaged by sharp edges
- Euro track roller system ensures smooth sliding action
- Handle has mortice lock for superior security
- Improved key positioning for easier operation
- Integrated tracks for insect, safety and security screens
- Low profile sill available

### Performance Parameters

Frame sizes	80mm / 140mm
Maximum door height	2450mm
Maximum door width	6246mm
Maximum panel width	1350mm
Maximum panel weight	50kgs
Maximum water rating	300pa
Maximum wind rating	2200Pa ULS
Maximum glass thickness	6.76mm
Maximum acoustic rating	Rw30
Maximum bushfire rating	BAL 40

**Note:** Features, benefits and performance parameters are subject to local variations, climate requirements and confirmation of structural performance



## signature range

#### Features and Benefits

- Shares the clean, contemporary look of other MCG Windows & Doors Signature products
- Available in 90° and 135° corner configurations (without a post)
- Available in multiple 'cavity' configurations
- Rounded box section interlocks and mullions prevent curtains from being damaged by sharp edges
- Euro track roller system ensures smooth sliding action
- Wider glazing pockets for superior acoustic and thermal performance
- Handle has mortice lock for superior security
- Improved key positioning for easier operation
- Integrated tracks for insect, safety and security screens
- Low profile sill available ^

#### Performance Parameters

Frame sizes	100mm / 166mm
Maximum door height ^	2700mm
Maximum door width	6246mm
Maximum panel width	1350mm
Maximum panel weight	100kgs
Maximum water rating	600pa*
Maximum wind rating	4500Pa ULS
Maximum glass thickness	12.76mm (single glazed) 18mm (IGUs)
Maximum acoustic rating	Rw35
Maximum bushfire rating	BAL 40

<sup>^</sup> Not applicable to cavity configurations

<sup>\*</sup> Does not apply to 166mm frame



# commercial range

### Features and Benefits

- Available in 90° and 135° corner configurations (without a post)
- Available in multiple 'cavity' configurations
- Rounded box section interlocks and mullions prevent curtains from being damaged by sharp edges
- Multiple bogey roller options for smooth sliding action
- Wider glazing pockets for superior acoustic and thermal performance
- Handle has mortice lock for superior security
- Improved key positioning for easier operation
- Integrated tracks for insect, safety and security screens
- Low profile sill available ^

### Performance Parameters

Frame sizes	100mm / 150mm 200mm / 250mm
Maximum door height ^	3100mm
Maximum door width	12000mm
Maximum panel width	1800mm
Maximum panel weight	160kgs
Maximum water rating	650pa
Maximum wind rating	4500Pa ULS
Maximum glass thickness	10.76mm (single glazed) 28mm (IGUs)
Maximum acoustic rating	Rw34
Maximum bushfire rating	BAL 40

<sup>^</sup> Not applicable to cavity configurations



## cavity sliding doors

signature | commercial


### A fusion of ingenuity and practicality

MCG Windows & Doors **Cavity Sliding Doors** will revolutionise how outdoor and entertainment areas are designed. Unlike traditional 'entertainment doors' such as stacker doors or bi-fold doors, our Cavity Doors truly provide unobstructed views and access. Seamlessly gliding out of sight, they don't have fixed or folded panels blocking the view or access from the inside to the outside.



### corner sliding doors

signature | commercial

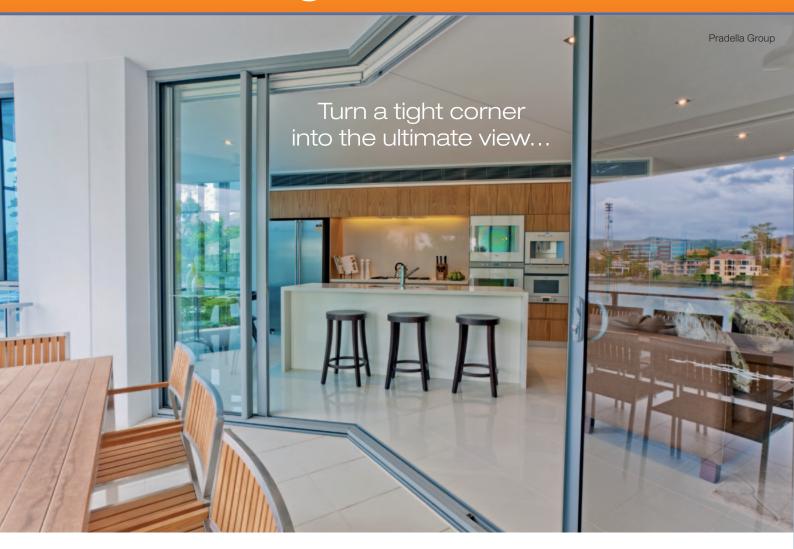

### Spectacular from any angle

Be it a new architecturally designed home or a renovation enhancement of an existing property, our **Corner Sliding Doors** are perfect for joining living areas with gardens, patios or pool areas. They are capable of spanning either a 90 or 135 degree angle without a post, providing better access and view compared to standard sliding or stacker doors.

Bi-folds | Stackers | Pivot Doors | Double Glazed | Sashless | Louvres | Frameless | Shopfronts



MCG Windows & Doors products are proudly made in Australia and designed specifically to meet all Australian conditions

**Note:** Products may be subject to local variation, regulatory requirements and confirmation of structural performance. Screening not available in selected configurations.









For more information call 1300 766 349

**Head Office** 

2-4 Jesmond Road, Croydon Fax 9723 9780

Mornington Branch 61A / 1140 Nepean Hwy, Mornington Fax 5973 6841